KINVOCA

User Manual

Wireless Kitten Controller

Different colors have the same function

Product Layout:

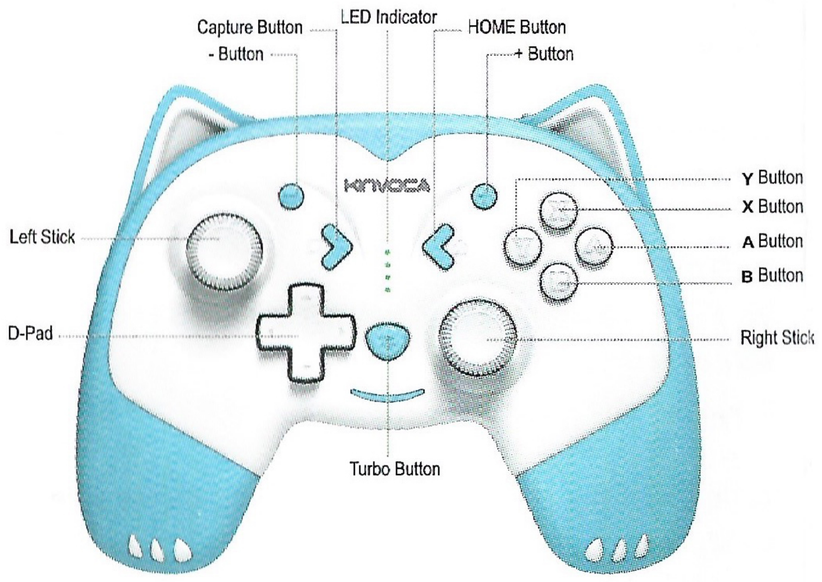

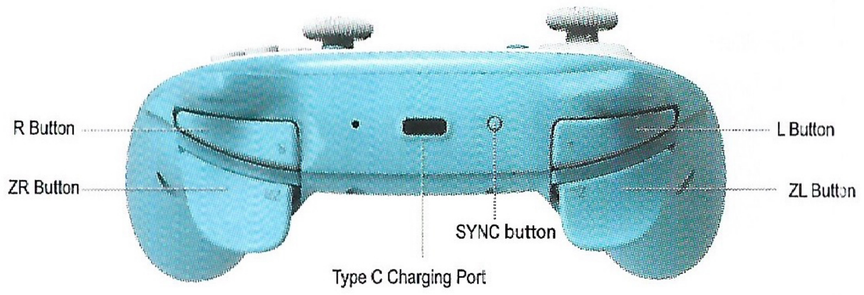

Product Features:

1.Product Size:127mm*82mm*49mm
2.Product Weight:118g± 10g
3.Material: ABS material
4.Connect Method: Connect Via Bluetooth
5.Vibration: With double motors inside, support vibration on switch console.
6.Sensor: With six axis inside to make games feel in reality

How to Connect:

Wireless Mode:

- Select "Controllers - Change Grip/Order"
- Holding down the controller's SYNC Button untill flashes

Reconnection:

- Holding down the HOME Button or L/R Button to reconnect

Power Off:

- Press SYNC Button briefly

What to do when controllers keep disconnecting:

- Restart your Switch Console
- Use wired connection for the initial pairing and reconnect wirelessly

Wired Mode:

You must have the "Pro Controller Wired Communication" setting turned ON in order to play and charge simultaneously with Mini Wireless Core Controller on the Switch console.

Please note: You can only use the controller in wired mode when the Switch is inside a compatible dock.

- Place the Switch Console into the dock and turn the console on.
- Connect the Type-C end of the cable into the Type-C port located on the top of the Mini Wireless Core Controller.
- Plug in the standard USB connector on the cable into one of the USB ports on the side of the Switch dock, or the USB port located on the back of the dock.
- Wait until the green LEDs on the front of the controller turns on.
- Sync the controller with the console by pressing any button (Not the turbo button) on the controller.

Please Note: After you synced the controller via the charging cable, you may disconnect the charging cable anytime and use the controller wirelessly.

Console paring interface

A.

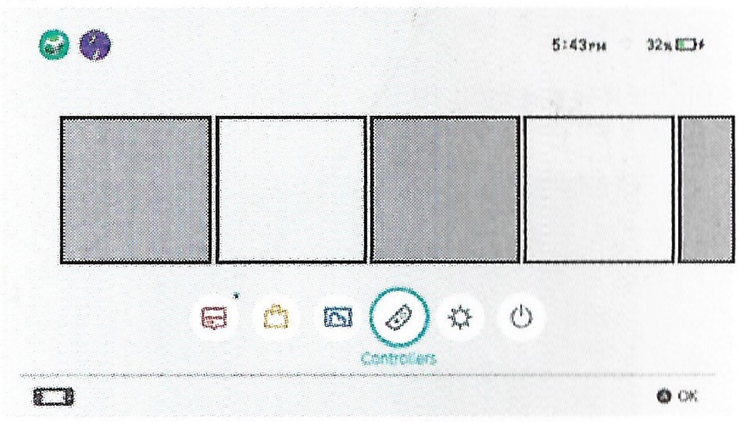

B.

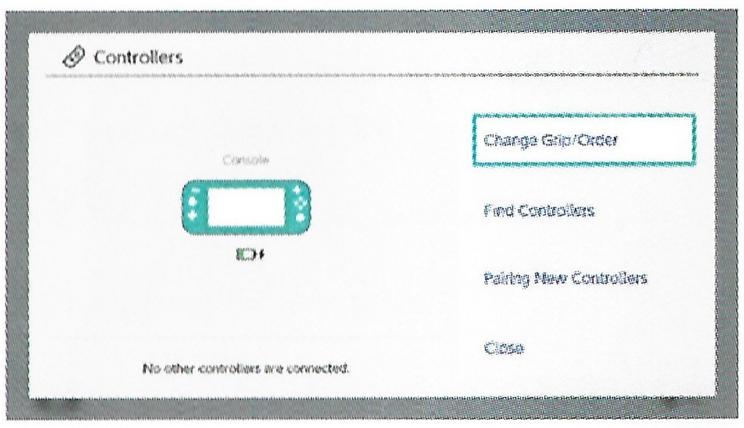

C.

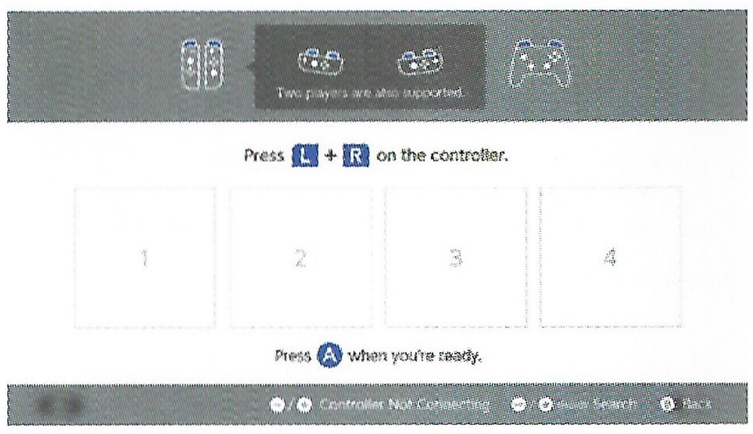

D. Hold SYNC Button 3-5 seconds

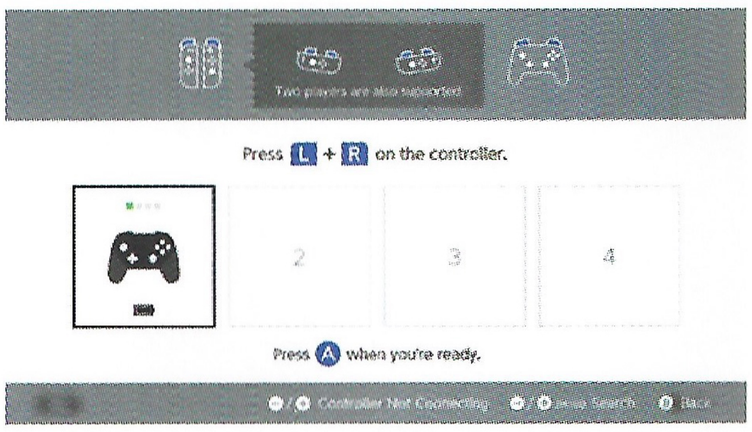

Using Turbo and Auto-Fire Functionality:

Turbo and auto-fire functionality can be set to multiple buttons at the same time. Try out different combinations and settings for different games to find the best settings for optimum gameplay.

Turbo and auto-fire is compatible with the following buttons:
Y, X, B, A, L, ZL, R, ZR.

Enabling Turbo and/or Auto-Fire:

- Press and hold the button.
- While still holding the button, press once any button(s) you wish to have turbo functionality. To set the button to auto-fire, press the button you wish to set to auto-fire once more, while still holding the button.
- When you are finished with your settings, let go of the button.

Disabling Turbo and Auto-Fire for a Specific Button:
Turn off turbo- press and hold the button, then press the turbo enabled button(s) twice.
Turn off auto-fire- press the auto-fire enabled button(s) once while holding the button.
To reset all turbo and auto-fire settings on the controller, press and hold the button and the (-) simultaneously.

How to Adjust Turbo Speed:

1. Keep your controller connected
2. Select "Controllers - Find Controllers"
3. Hold "TURBO" Button, push right 3D stick up/down to increase/decrease turbo level

How to Adjust Vibration Strength:

1. Keep your controller connected
2. Select "Controllers - Find Controllers"
3. Hold "TURBO" Button, push left 3D stick up/down to increase/decrease turbo level

PC Mode:

Connect controller into PC via our charging cable, when LED1 and LED4 keep lighting means connect successful.
The controller should default into Xinput mode on PC, and the ABXY button is in switch key layout, which is not standard PC key layout.
Please adjust the key layout as required in the game.

Charging:

Charging display: During in charging the 4 led lights will keep flashing,
The 4 lights are always on after charging in the power on state,
The 4 lights will be off after charging in the off state

NOTE: Please note power input should be 5V1A, DO NOT use fast charger or high power chargers including Switch original charger

Calibrate control sticks

1. Press the Home button to return to the host interface and select system settings

2. Press A to enter the following interface, select "calibrate control sticks"

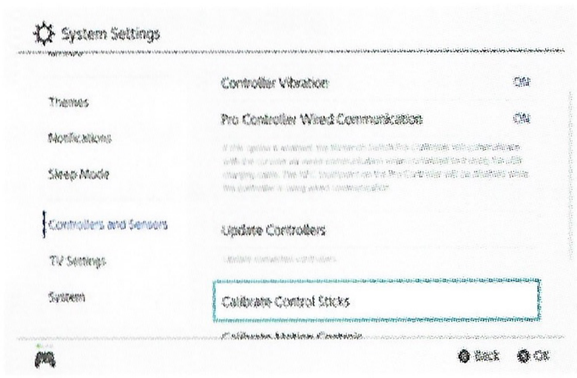

3. Press A to enter the following interface

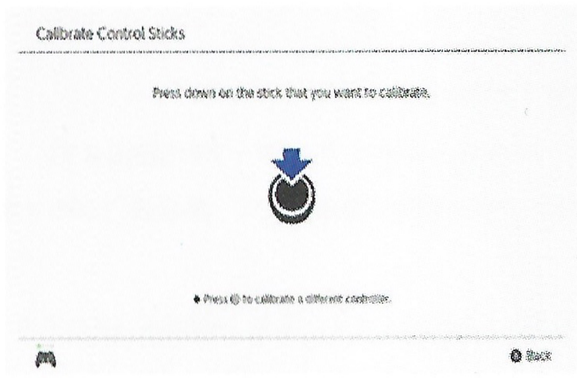
Calibrate Control Sticks
Press down on the stick that you want to calibrate.
Press to calibrate a different controller.
Back

4. Press the rocker (left rocker/right rocker) to be calibrated to enter the following interface for calibration

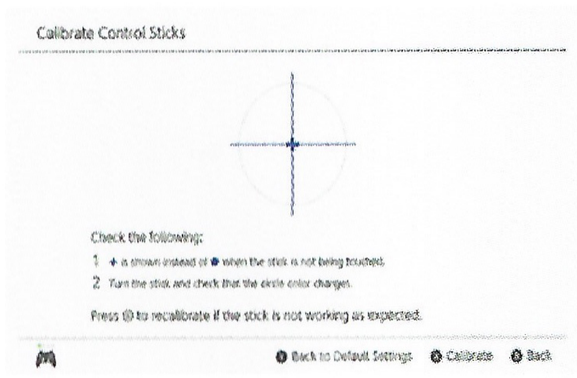
Calibrate Control Sticks
Check the following:
1 + is shown instead of when the stick is not being touched.
2 Turn the stick and check that the circle color changes.
Press to recalibrate if the stick is not working as expected.
Back to Default Settings
Calibrate
Back

5. Press the X button to adjust the interface, and continue the next step according to the host indication

Calibrate motion controls (recommended to do this after the first connection, to ensure the normal use of the shaft)

A. In the state of machine power off, press "-" and "B" at the same time, and finally press the Home button, LED1, LED2 and LED3, LED4 will flash alternately and enter debugging state.

B. Place the handle on the desktop or other flat position. press"+" button, the host will calibrate automatically. After the calibration is completed, the handle will be automatically connected to the host.

C. After completing, please re-enter the handle debugging interface to test whether the handle is OK.

D. The host confirms automatically when the below interface appears, it indicates that the calibration has been completed and can be used normally.

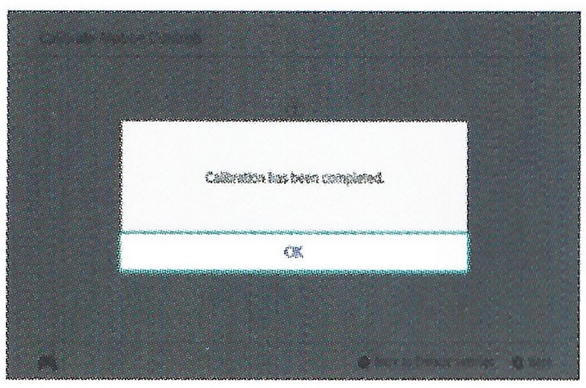

Battery

Controller inset 300mAh lithium battery, Charge 3hours can use 7-8hous.

Ears and Paws

The ears and paws are made of soft rubber, giving you the best tactile experience.

Three light effect modes of ears: breathing mode→light on→light off. Press both the "L" and "R" button for 5 seconds to switch the lighting effect mode.

KINVOCA

無線コントローラ
取扱説明書

●製品ボタンのレイアウト

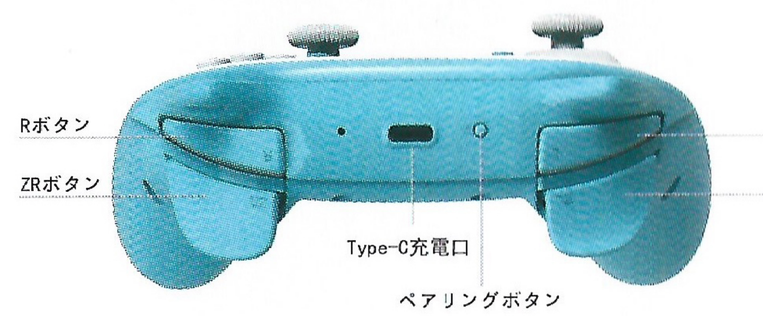

●商品の特徴：

1、サイズ：127*82*49㎜ 、アジア人手形専用に設計

2、商品重量：118g±10g

3、材質：斬新ABS環境保護材料

4、連接方法：Bluetooth接続（Bluetoothバージョン：2.1）

5、振動：ダブルモーター、強力な振動モード

6、ジャイロスコープを6個組込、クールなゲーム体験できる

7、連射モード、自動連射と連射モードのクリア機能あり

8、イヤホンジャック付き（3.5㎜）

●スイッチ本体接続方法：

注意：接続前に電源をONにし、スイッチ本体のシステムとコントローラを最新のバージョンに更新してご使用ください。

【初回使用】

①スイッチ本体の電源を入れて、起動してください。

②コントローラ設定画面に入り、"R"+"L"ボタンを同時に2秒以上押して起動してください。（押し間違いがないように、先にYボタンを押しながら、HOMEボタンを押してください。また、二つボタンは２秒以上押してください。）

③4つのLEDが点滅し、コントローラが検索モードに入ります。接続成功後、点滅が停止、点灯します

注意：コントローラが検索モードに入った後、2分30秒以内に同期されない場合、自動的にスリープモードに入ります。

【二回目以降の使用時】

①HOMEボタンを1秒以上押すと、コントローラが起動します。

②本体が起動した後自動的に接続します。 接続後、LEDランプが光ります。

注意：10秒経過しても接続できない場合、自動的にスリープモードに入ります。

HOMEボタン以外のボタンでは起動できません。

●コントローラ設定画面

1.

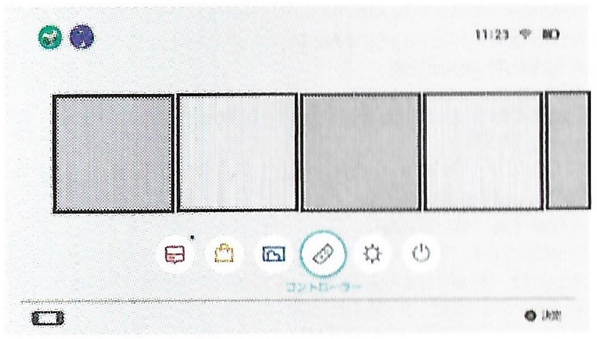

2.

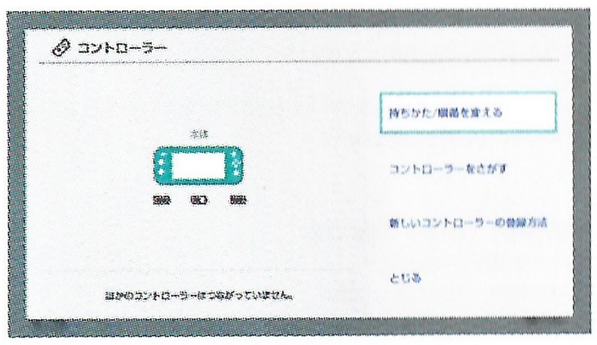

3.

●スティック校正

1. ホームキーを押してホストメインインターフェイスに戻る、システム設置に選択.

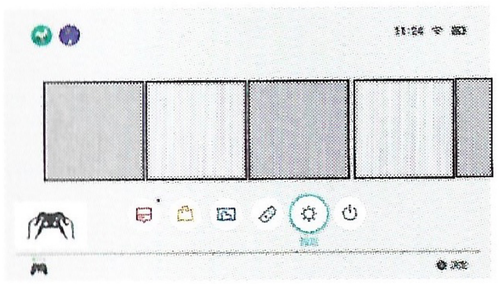

2. Aボタンを押して次のインターフェースに入り、“スティックの補正”を選択します

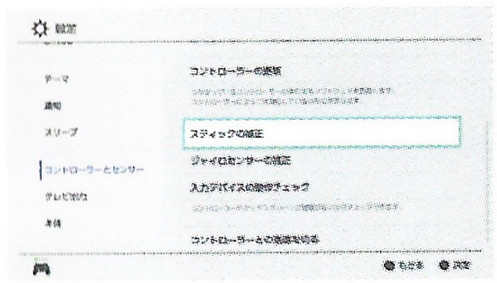

3. Aボタンを押して下記のインターフェースを入る

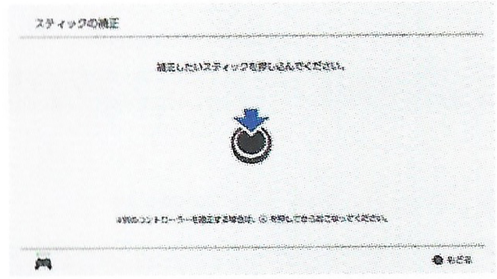

4. ジョイスティック（左ジョイスティック/右ジョイスティック）を押して較正すると、次の較正用のインターフェースに入ります

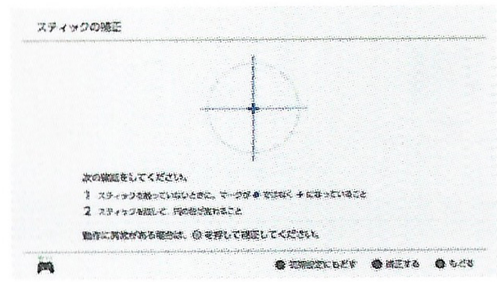

5.Xボタンを押して、画面を調整します。それにホストの指示より次の操作を進行する。

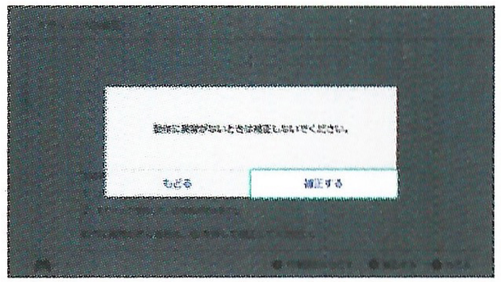

●ジャイロセンサー（シャフトの通常使用を保証するために、この動作は初回接続後にお勧め）A.シャットダウン状態に“-”と“B”ボタンを押して、最後にホームボタンを押し、LED1,LED2とLED3、LED4が低滅し、調整状態に入ります。B.本製品をデスクまた他の平坦な位置に置き、"+"ボタンを押しますと、スイッチ本体が自動的に調整し、本製品が自動的に本体と接続します。

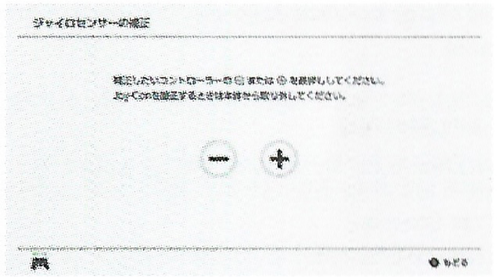

C. 完成後に改めて本製品の調整画面に入り、使用操作を確認します

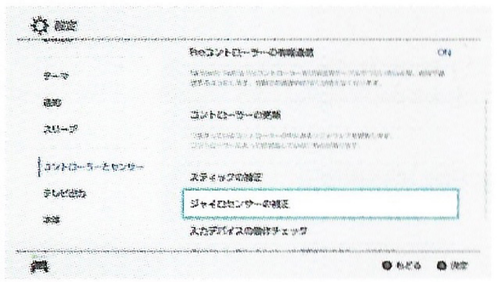

D. スイッチ本体は自動的に認証し、下記画面に“OK”をクリックして、完成になります

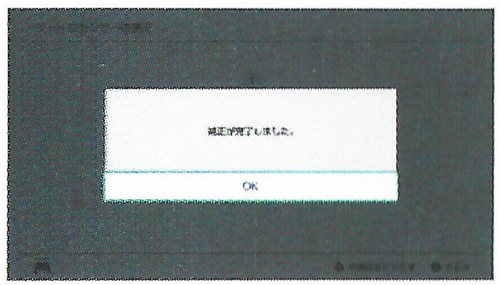

●自動スリープ

①ホスト画面が閉じると、コントローラが自動的にスリープモードになる

②5分以内ボタンを押せなければ自動的にスリープモードになる。【センサーも動かない】

③Bluetoothモードで、HOMEボタンを5秒押しますと、ホストの接続と切れます。

●充電表示

①コントローラ電源OFFしたら、充電時LED1-LED4は低速フラッシュ、満電にLEDオフ

②バッテリー低電圧アラーム：現在のインジケータランプが低滅します

③現在のチャンネルインジケータが点滅（遅い点滅）しています。充電中は常にフル電流が流れています。

④マッチ、充電に戻るか、バッテリーが少ないか、ペアにするには、LEDの説明に戻るようにします、

●低電圧アラーム

①もしリチウムの電圧が3.55V±0.1Vより低ければ、当時の通路ライトがフラッシュし提示する

②もしリチウムの電圧が3.45V±0.1Vより低ければ、自動的にスリープモードになる

●連射と自動連射（Turbo ）

スイッチ本体を接続時にどのモードでも使用可能

①A/B/X/Y/L1/L2/R1/R2十字ボタンの中で一つボタンを選んで押しながら、ボタンを押すと連射機能がプラスされます。

②連射ボタンを押しながら、ボタンを押すと自動的に連射します。

③連射ボタンを押しながら、 ボタンをプラスすると、単一ボタンの連射機能が消えます。（①②③が繰り返す）

④“-”と十字ボタン（DOWN）を同時に押すと、全てボタンの連射機能が削除されます。

●モーター強弱振動調整機能

コントローラのBluetooth接続状態

①“+”ボタンと十字ボタン(UP)（約3秒）を同時に押すと、モーター振動が強くなります。

②“-”ボタンと十字ボタン(UP)ボタン(約3秒)を同時に押すと、モーター振動が弱くなります。

③モーター振動は4段階に分かれています。毎回デフォルトは最大100%になります。

また、100%(最大)－70%－30%－0%(無振動)のように分かれています。

注意：モーター振動の強弱はスイッチ使用時に有効となり、PCとAndroid使用時は無効となります。

●PCモード

1.pc用データケーブルを使用接続して、後LED1-LED4ライトを点灯する時に、接続成功になります。またpc用データケーブルを使用ない場合は失敗することがあるます。正確なケーブル線をご使用ください。

2.pc端子はBluetooth機能を支持する場合に、接続する方法はBluetooth接続方法と同じです。（必ずpc端子はBluetooth機能を支持する）

●Androidモード

接続する方法とBluetooth接続の同じです。携帯設定界面でコントローラー設定界面に「pro controller」を見つけてペアリングする、後はご使用ください。"

●Bluetoothモード

製品本体中にペアリングボタンがある、そのボタンを約3秒間押し続けます、LEDライトが点灯されて続ける。次に、スイッチ本体の設定界面でコントローラー設定界面に「pro controller」を見つけてペアリングする後はご使用ください。"

●耳と爪

コントローラーの耳と爪は、柔らかいゴムで設計されており、まるで人体肌の様に触りのやわらか

耳のランプは3つのモードがあります。呼吸モード→通常モード→消灯です。「L」と「R」ボタンを同時に3秒間押しながら、ランプのモードを切り替えることができます。